

DC-7600 & DC-5100

Fast and
reliable




HIGHLIGHTS AT A GLANCE:

- In connection with DC-7600 single and double-sided lamination
- 2-line LCD display
- Suitable for laminates of 0.6 mil or 1.0 mil
- Processing speed up to 35 mm / sec.



DC-5100

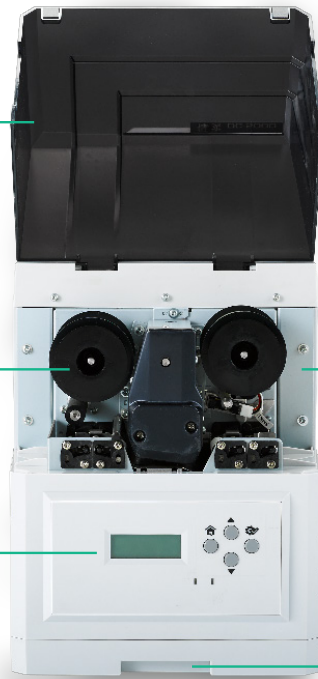

Housing opens upwards

Easy change of the laminate rolls

Robust housing design

User-friendly display

RFID tag for laminate

TECHNICAL DATA

Lamination method	Thermal direct
Lamination modus	Single side; Double side (only in combination with DC-7600)
Lamination speed	5 - 35 mm/sec.
Card thickness	0,48 - 1,1 mm (20 - 50 mil)
Card types	PVC, 85,6 x 53,98 mm (ISO ID-1/CR-80 format)
Card feeder	Manual insertion for single card or automatic feeding in combination with DC-7600
Interface	USB (2.0), Ethernet (10/100)
Security	RFID protected laminate roll
Consumables	Patches (200 pcs.; 0,6 mil thickness)
Sensor	Black Mark
Weight	8,3 kg
Dimension	220 x 270 x 370 mm (B x T x H)
Voltage	100 - 240 V AC - 50/60 Hz
Power consumption	96 W
Temperature	Laminating: +15° to +30° C; 35 - 70% rel. humidity Storing: +5° C to +45° C; 20 - 90% rel. humidity
Warranty	For more details please contact your local dealer



The DASCOM DC-5100 can be used with different patches and thin films with a thickness up to 1,0 mil.

CHINA

Jiangmen Dascom Computer Peripherals Co., Ltd.
No.399,Jinxing Road | Jianghai District | Jiangmen City
Guangdong Province | CHINA
Tel.: +86 0750-3868008 | Fax: +86 0750-3868011
info.cn@dascom.com | www.dascom.com

APAC

DASCOM AP Pte. Ltd.
2 Jurong East Street 21 | #05-42, IMM Building
Singapore 609601
Tel.: +65 6760 8833 | Fax: +65 67601066
info.sg@dascom.com | www.dascom.com.sg

AMERICAS

DASCOM Americas
34 Lakeview Court | Verona | Virginia, 24482 | USA
Tel.: +1 (877) 434-1377
info.us@dascom.com | www.dascomamericas.com

EMEA

DASCOM Europe GmbH
Heuweg 3 | 89079 Ulm | GERMANY
Tel.: +49 731 2075-0 | Fax: +49 731 2075-100
info.de@dascom.com | www.dascomeurope.de